
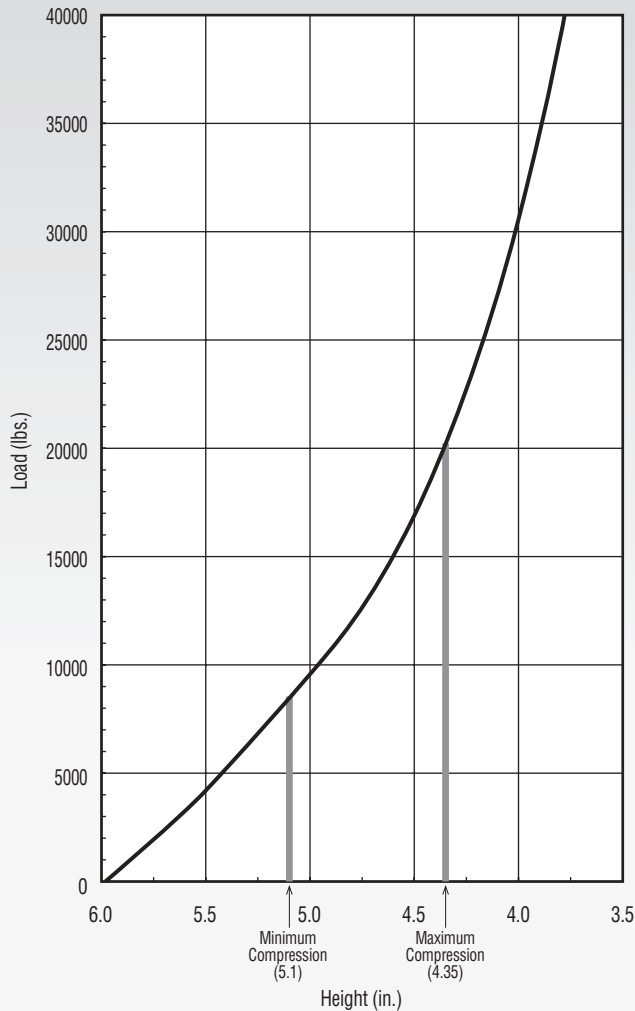


**IMPERIAL**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (lbs.)</b>	8200	11700	14000	16625	20000
<b>Height (in.)</b>	5.1	4.8	4.65	4.5	4.35
<b>Rate (lbs./in.)</b>	11200	13700	16600	20000	23600
<b>Effective Deflection (in.)</b>	0.73	0.85	0.84	0.83	0.85
<b>Natural Freq. (CPM)</b>	220	203	205	206	204
<b>Maximum OD (in.)</b>	13.7				
<b>Weight (lbs.)</b>	19.58				

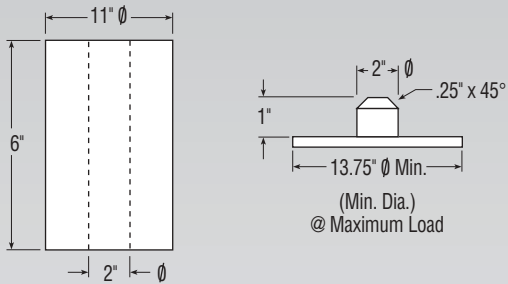

**METRIC**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (kN)</b>	36.44	52.00	62.22	73.89	88.89
<b>Height (mm)</b>	130	122	118	114	110
<b>Rate (kN/m)</b>	1960	2397	2905	3500	4129
<b>Effective Deflection (mm)</b>	19	22	21	21	22
<b>Natural Freq. (Hz)</b>	3.66	3.39	3.41	3.44	3.40
<b>Maximum OD (mm)</b>	348				
<b>Weight (kg)</b>	8.92				

