
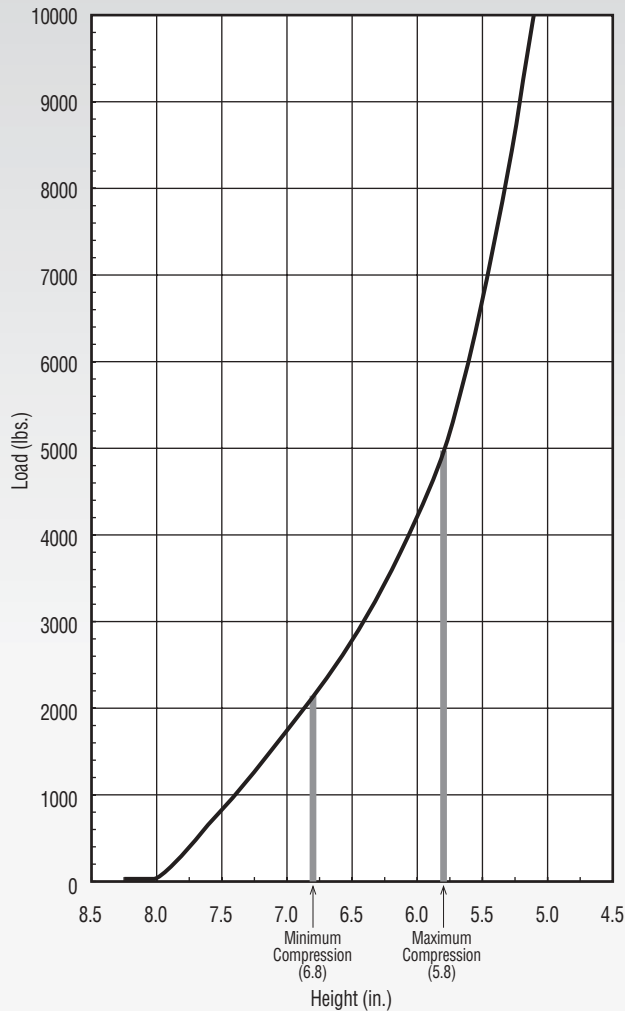


**IMPERIAL**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (lbs.)</b>	2180	3060	3650	4100	4670
<b>Height (in.)</b>	6.8	6.4	6.2	6.0	5.8
<b>Rate (lbs./in.)</b>	2273	2448	2524	2594	2558
<b>Effective Deflection (in.)</b>	1.0	1.2	1.4	1.6	1.8
<b>Natural Freq. (CPM)</b>	192.0	168.2	156.3	150.0	142.0
<b>Maximum OD (in.)</b>	6.4	6.6	6.7	6.8	7.0
<b>Weight (lbs.)</b>	7.84				

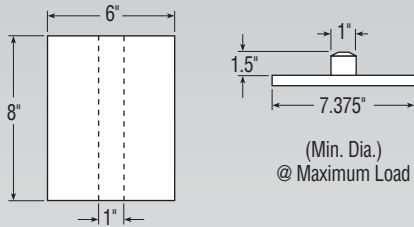

**METRIC**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (kN)</b>	9.69	13.60	16.22	18.22	20.76
<b>Height (mm)</b>	173	163	157	152	147
<b>Rate (kN/m)</b>	397	428	441	453	465
<b>Effective Deflection (mm)</b>	25	30	36	41	46
<b>Natural Freq. (Hz)</b>	3.20	2.80	2.61	2.50	2.37
<b>Maximum OD (mm)</b>	163	168	170	173	178
<b>Weight (kg)</b>	3.57				

