


### IMPERIAL

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (lbs.)</b>	1965	2610	3070	3550	4050
<b>Height (in.)</b>	5.1	4.8	4.7	4.5	4.4
<b>Rate (lbs./in.)</b>	2684	2985	3118	3242	3359
<b>Effective Deflection (in.)</b>	0.7	0.9	1.0	1.1	1.2
<b>Natural Freq. (CPM)</b>	220	201	190	180	171
<b>Maximum OD (in.)</b>	6.4	6.5	6.6	6.7	6.9
<b>Weight (lbs.)</b>	5.78				

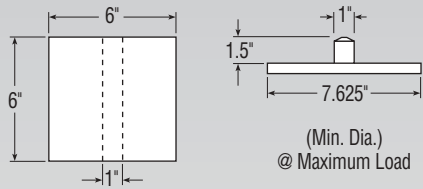

### METRIC

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (kN)</b>	8.73	11.60	13.64	15.78	18.00
<b>Height (mm)</b>	130	122	119	114	112
<b>Rate (kN/m)</b>	470	522	546	567	588
<b>Effective Deflection (mm)</b>	18	23	25	28	30
<b>Natural Freq. (Hz)</b>	3.66	3.35	3.17	3.00	2.85
<b>Maximum OD (mm)</b>	163	165	168	170	175
<b>Weight (kg)</b>	2.63				

