

Models 803 and 818

KUNKLE

Non-code Air/Gas Relief Valves

Feature

- **Every valve is 100% tested/inspected** for pressure setting and leakage.
- **Factory sealed** to prevent tampering or disassembly.

Applications

- Small to medium size, single and multi-stage, air compressors, intercoolers, after coolers, instrument/control air lines and systems.
- Air tanks/receivers and pressurized equipment.

Pressure and Temperature Limits

Model 803:

1000 to 6000 psig
-20° to 185°F


Model 818:

120 and 150 psig
-20° to 300°F



Models 803 and 818

Specifications

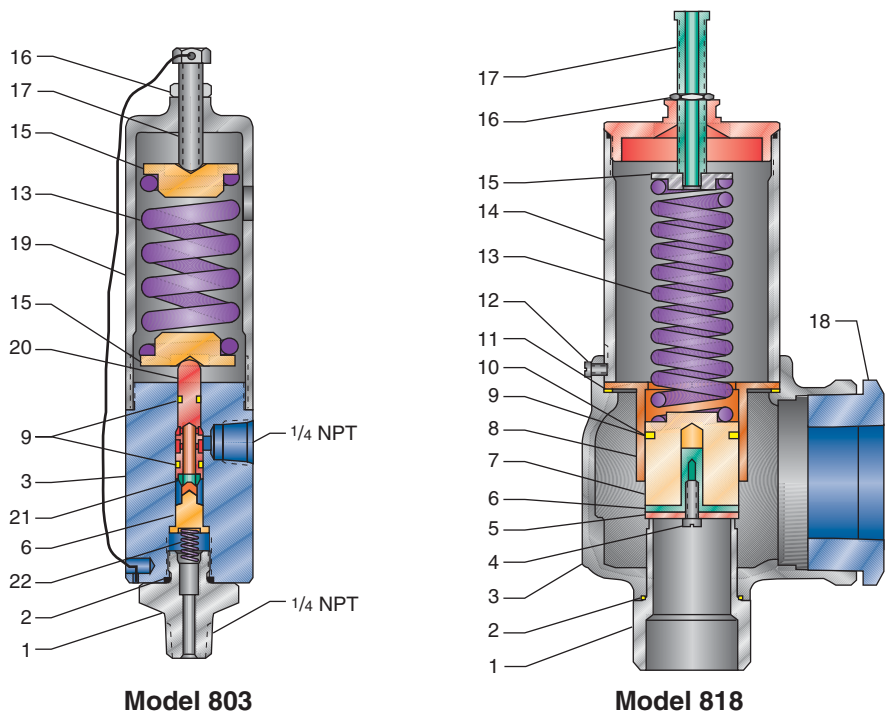

Capacity for Model 803 (SCFM at 60°F, 10% overpressure)

1000 psi - 45 SCFM
1200 psi - 50 SCFM
1500 psi - 55 SCFM
1800 psi - 60 SCFM
2000 psi - 63 SCFM
2500 psi - 70 SCFM
3000 psi - 77 SCFM
3500 psi - 83 SCFM
4000 psi - 90 SCFM
4500 psi - 95 SCFM
5000 psi - 100 SCFM
5500 psi - 104 SCFM
6000 psi - 109 SCFM


Consult factory for Model 818.

Parts and Materials

No.	Part Name	803	818
1	Nozzle	SS A582-303	SS A582-303
2	O-ring	Teflon®	Viton®
3	Body	Aluminum B211	SS, SA216 Gr. WCB
4	Disc Screw	N/A	SS/Nylon Lock, Brass B16
5	Disc Insert	N/A	Teflon®
6	Bottom Disc	SS A582-303	Brass, B16
7	Disc Holder	N/A	Brass, B16
8	Guide	N/A	SS, A582-416
9	Seal Ring	Teflon®	Plastic
10	O-ring - Seal Ring	N/A	Viton®
11	Body Gasket	N/A	Teflon®
12	Body Set Screw	N/A	Steel, A108
13	Top Spring	Steel A231, Aluminum Coated	SS, 17-7 PH
14	Bonnet	N/A	Steel, SA106 and/or A108
15	Step Spring	Aluminum B211	Brass, B16
16	Jam Nut	SS 18-8	Brass, B16
17	Compression Screw	SS A582-303	Brass, B16
18	Reducer	N/A	Steel, A108
19	Cap	Aluminum B211	N/A
20	Top Disc	SS A582-303	N/A
21	Seat	Kynar®	N/A
22	Bottom Spring	SS A313-302	N/A

Models 803 and 818

Dimensions

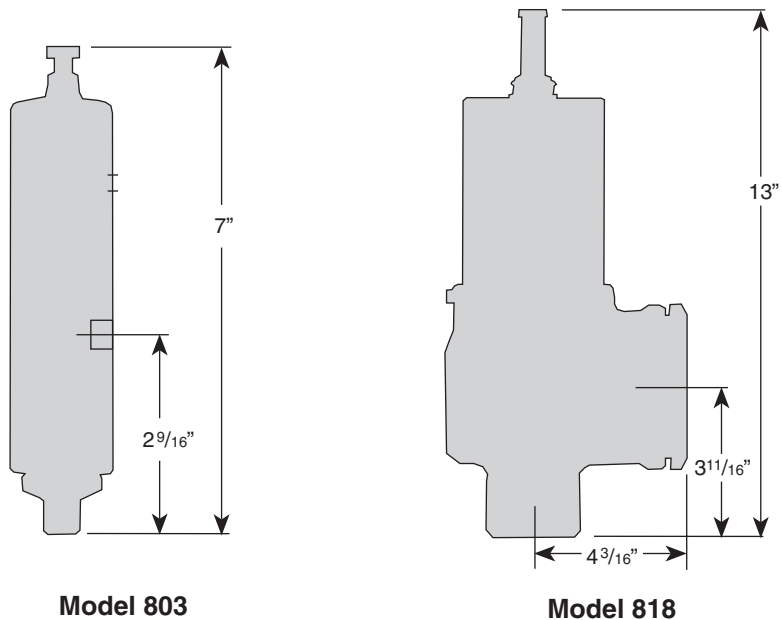

Model Number/Order Guide

Model Number Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	0	8	0	3	-	A	0	1	-	N	C	0	0	5	0

Model —————

0803
0818

Inlet Size —————

A - 1/4-inch (Model 803)
H - 2-inch (Model 818)

Variation (01 through 99) —————

01 - Catalog standard

Design Revision —————

Indicates non-interchangeable revision. Dash (-) if original design.

Spring Material —————

C - Steel (Model 803)
M - 631 SS (Model 818)

Set Pressure —————

803 - 1000 to 6000
818 - 120 (0120) and 150 (0150)

Models 803 and 818

Facility Phone: 828-669-3700

Tyco Valves & Controls

www.kunklevalve.com

Tyco Flow Control (TFC) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to TFC products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. TFC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, TFC WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. Tyco reserves the right to change product designs and specifications without notice.