
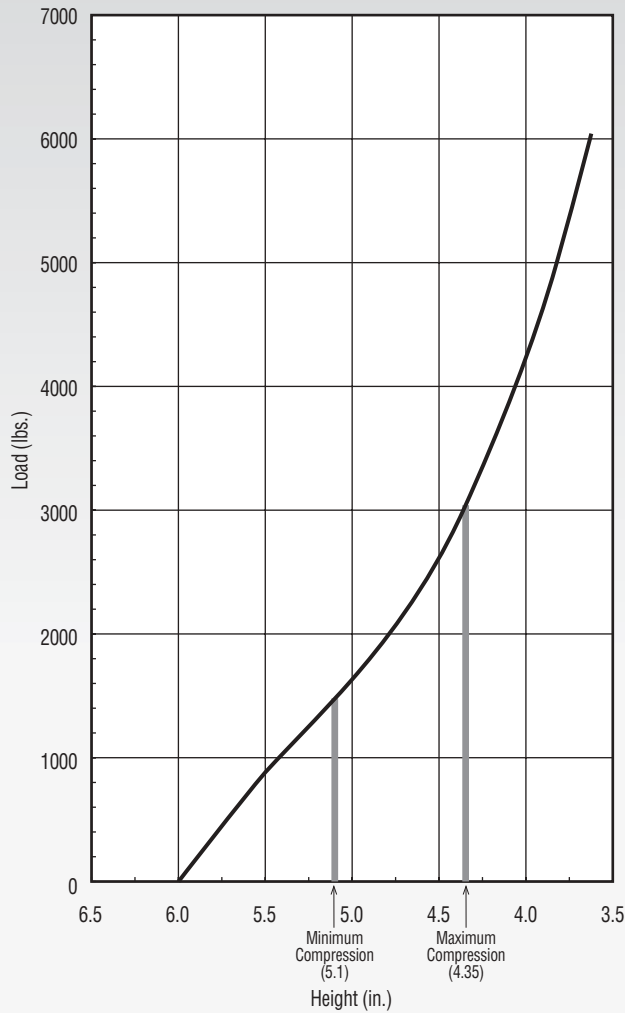


**IMPERIAL**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (lbs.)</b>	1400	1980	2340	2660	3080
<b>Height (in.)</b>	5.1	4.8	4.65	4.5	4.35
<b>Rate (lbs./in.)</b>	1720	2080	2360	2720	3200
<b>Effective Deflection (in.)</b>	0.81	0.95	0.99	0.98	0.96
<b>Natural Freq. (CPM)</b>	208	193	189	190	192
<b>Maximum OD (in.)</b>	6.5	6.6	6.7	6.8	6.9
<b>Weight (lbs.)</b>	4.42				

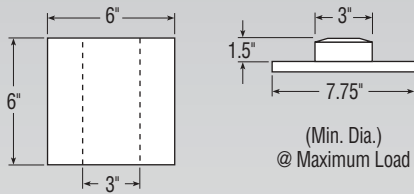

**METRIC**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (kN)</b>	6.22	8.80	10.40	11.82	13.69
<b>Height (mm)</b>	129	122	118	114	110
<b>Rate (kN/m)</b>	301	364	413	476	560
<b>Effective Deflection (mm)</b>	21	24	25	25	24
<b>Natural Freq. (Hz)</b>	3.47	3.21	3.15	3.17	3.19
<b>Maximum OD (mm)</b>	165	168	170	173	175
<b>Weight (kg)</b>	2.01				

