


IMPERIAL

| | | | | | |
|-----------------------------------|-------|------|------|------|------|
| Compression (%) | 15.0 | 20.0 | 22.5 | 25.0 | 27.5 |
| Load (lbs.) | 3800 | 5300 | 6200 | 7200 | 8400 |
| Height (in.) | 6.8 | 6.4 | 6.2 | 6.0 | 5.8 |
| Rate (lbs./in.) | 3508 | 4141 | 4727 | 5492 | 6436 |
| Effective Deflection (in.) | 1.1 | 1.3 | 1.3 | 1.3 | 1.3 |
| Natural Freq. (CPM) | 181 | 166 | 164 | 164 | 165 |
| Maximum OD (in.) | 8.2 | 8.5 | 8.7 | 9.0 | 9.3 |
| Weight (lbs.) | 13.52 | | | | |

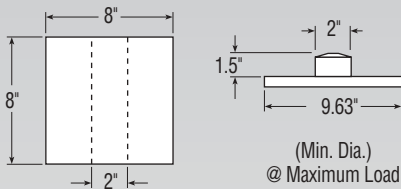

METRIC

| | | | | | |
|----------------------------------|-------|-------|-------|-------|-------|
| Compression (%) | 15.0 | 20.0 | 22.5 | 25.0 | 27.5 |
| Load (kN) | 16.89 | 23.58 | 27.56 | 32.00 | 37.33 |
| Height (mm) | 173 | 163 | 157 | 152 | 147 |
| Rate (kN/m) | 614 | 725 | 827 | 961 | 1126 |
| Effective Deflection (mm) | 28 | 33 | 33 | 33 | 33 |
| Natural Freq. (Hz) | 3.02 | 2.77 | 2.73 | 2.73 | 2.75 |
| Maximum OD (mm) | 208 | 216 | 221 | 229 | 236 |
| Weight (kg) | 6.16 | | | | |

