


### IMPERIAL

|                            |       |       |       |       |       |
|----------------------------|-------|-------|-------|-------|-------|
| Compression (%)            | 15.0  | 20.0  | 22.5  | 25.0  | 27.5  |
| Load (lbs.)                | 8300  | 12000 | 14000 | 16200 | 19600 |
| Height (in.)               | 6.8   | 6.4   | 6.2   | 6.0   | 5.8   |
| Rate (lbs./in.)            | 8917  | 9690  | 10025 | 10335 | 10623 |
| Effective Deflection (in.) | 0.9   | 1.2   | 1.4   | 1.6   | 1.9   |
| Natural Freq. (CPM)        | 195   | 169   | 159   | 150   | 138   |
| Maximum OD (in.)           | 13.4  |       |       |       |       |
| Weight (lbs.)              | 26.60 |       |       |       |       |

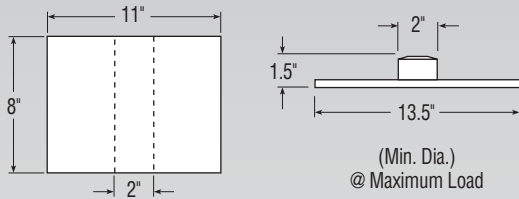

### METRIC

|                           |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|
| Compression (%)           | 15.0  | 20.0  | 22.5  | 25.0  | 27.5  |
| Load (kN)                 | 36.89 | 53.33 | 62.22 | 72.00 | 87.11 |
| Height (mm)               | 173   | 163   | 157   | 152   | 147   |
| Rate (kN/m)               | 1560  | 1696  | 1754  | 1808  | 1859  |
| Effective Deflection (mm) | 23    | 30    | 36    | 41    | 47    |
| Natural Freq. (Hz)        | 3.25  | 2.82  | 2.65  | 2.50  | 2.31  |
| Maximum OD (mm)           | 340   |       |       |       |       |
| Weight (kg)               | 12.11 |       |       |       |       |

